









 SELV IP67

		PF 0.90 (100%)
(Typ.)	88%	: 240VAC, 100%
		0.60A/220VAC (100%)
		60A Max. /240VAC
		0.7mA at 240VAC 2mA at 240VAC
(THD)		THD 20%
		1
		8.33A Max.
		12Vdc
		± 5%
		10% 100%
		10% 100%
/		5%
		0.1S, 240VAC
		110
Ta)		-40 +50 100%
Tc		80 100%
		20 95%RH
		-40 +80 10 95%RH
		± 0.03% 0 50
		10 500Hz 5G 12 / X Y Z 72
		GB19510.1/IEC61347-1 ; GB19510.14/IEC61347-2-13
		I/P-O/P: 3 75KVAC 60S(100mA) I/P-FG 1. 875KVAC O/P-FG 0 5KVAC , 60S(10mA)
		I/P-O/P, I/P-FG O/P-FG 10CN at 500VDC/25 /70%RH
		GB17625.1/IEC61000-3-2 ; GB17743/CISPR15
		GB/T 18595/IEC61547
		: L-N 6KV L, N-G 6KV
		50000 at Ta
		233x 74x 42.2mm(Lx W H),
		1150 /
		1. 220VAC 25
		2. EMC
		3. EMC

		100W 12V	: 2.0	: 2/2
		HQLPV100/221/12T/DE1		2018/6/25

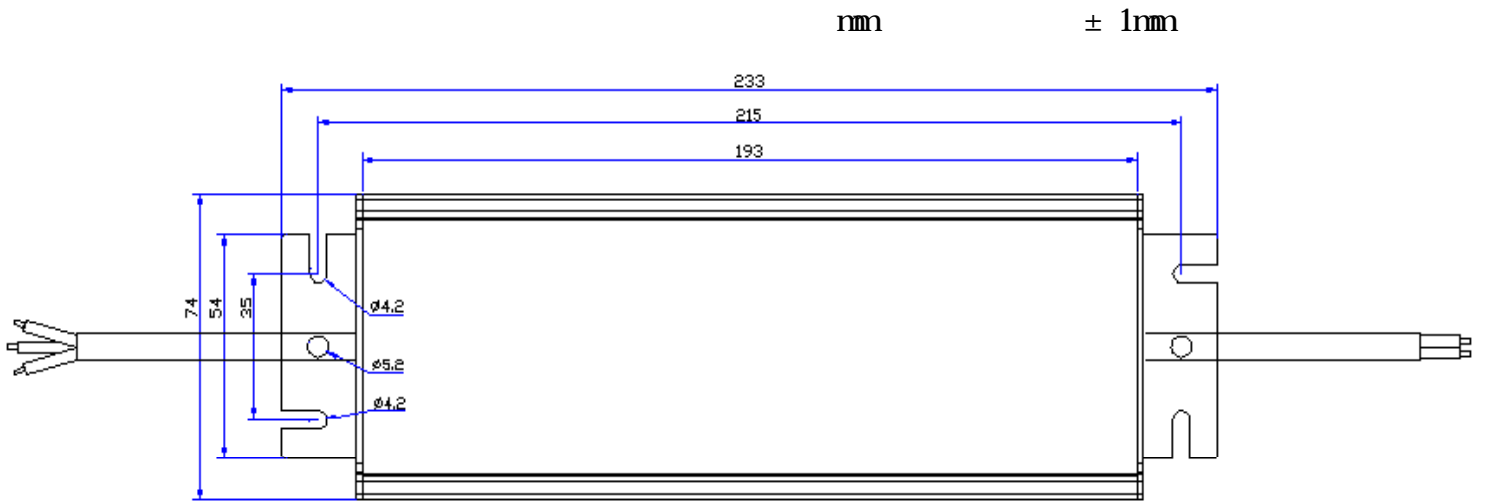

3× 1.0	350± 20mm	30mm	5mm
2× 1.0	300± 20mm	30mm	5mm