
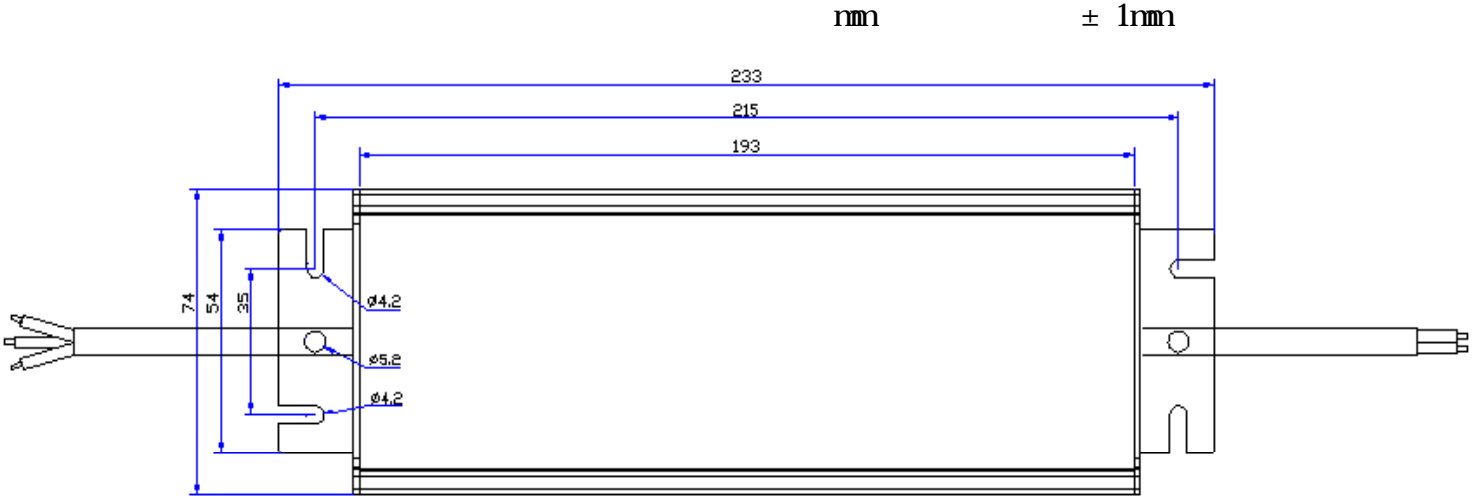


	150W 24V	: 2.0	: 1/2
	HQLPV150/221/24T/DE1		2018/6/25

	198 265VAC		
	PFC		
	88%		
	IP67	/	È 3 GB
	LED		
	/ /		
			

		PF 0.90 (100%)	
(Typ.)	88%	:	240VAC, 100%
		0.90A/220VAC (100%)	
		60A Max / 240VAC	
		0.7mA at 240VAC	2mA at 240VAC
(THD)	THD	20%	
		1	
		6.25A Max	
		24Vdc	
		± 5%	
		10% 100%	
		10% 100%	
/		5%	
		0.1S, 240VAC	
		110	
Ta)	-40 +50	100%	
Tc	80	100%	
	20	95%RH	
	-40 +80	10 95%RH	
	± 0.03%	0 50	
	10 500Hz	5G 12 / X Y Z 72	
	GB19510.1/IEC61347-1 ; GB19510.14/IEC61347-2-13		
	I/P-O/P: 3 75KVAC 60S(100mA) I/P-FG 1. 875KVAC O/P-FG 0 5KVAC , 60S(10mA)		
	I/P-O/P, I/P-FG O/P-FG 10CN at 500VDC/25 /70%RH		
	GB17625.1/IEC61000-3-2 ; GB17743/CISPR15		
	GB/T 18595/IEC61547		
	: L-N 6KV L, N-G 6KV		
	50000	at Ta	
	233x 74x 42.2mm(Lx W H),		
	1150 /		
1.	220VAC	25	
2.	EMC		EMC
3.			

		150W 24V	: 2.0	: 2/2
		HQLPV150/221/24T/DE1		2018/6/25



3× 1.0	350± 20mm	30mm	5mm
2× 1.0	300± 20mm	30mm	5mm